

Air Heaters HRKK with Delta Fins



HRKK-D 16/24 (S)

HRKK-D 24/24 (M)

HRKK-D 28/24 (L)

Features

- New frame allows for easy screw installation
- High heat output with minimal pressure loss due to delta-shaped fins
- 50+ percent less pressure drop compared to HRI


HRKK Delta	HRKK-D 16/24 S	HRKK-D 24/24 M	HRKK-D 28/24 L
Rated voltage [V]	230	230	230
Power output at 20°C, 300m³/h [W]	1100	1375	1500
Inrush current [A]	8	12	14
Differential pressure at 20°C, 300m³/h [Pa]	72	26	21
Dimensions Length L1 [mm]	120,6	174,6	198
Dimensions Length L2 [mm]	114,6	168,6	192
Dimensions Length L3 [mm]	96	150	174
Heating circuits	4	4	4

Design Drawing



Options:

- (1) Mounting frame made of temperature-resistant plastic available for HRKK Delta M
- (2) Enclosure with finger guard and connection cable available for HRKK Delta L
- Temperature limiter
- Custom solutions (size & shape, voltage, power output) on request

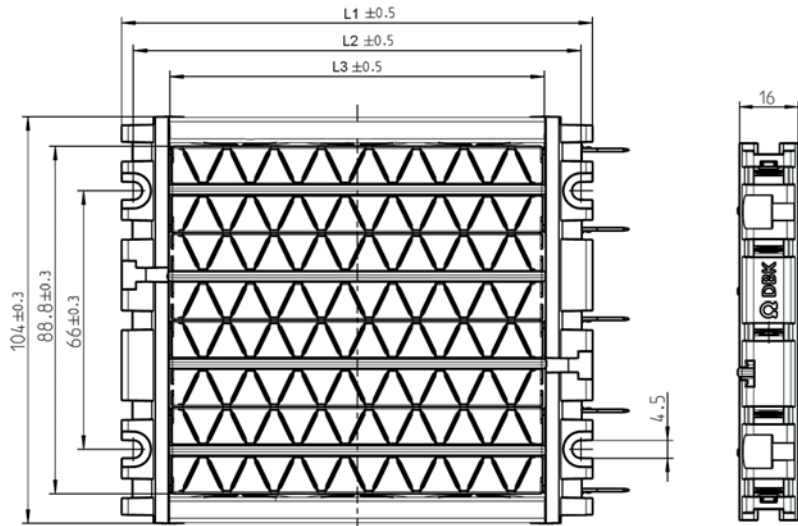

Front view - New frame

Side view

DBK's knowledge of thermal management gives us the expertise to guide and support you with your technical challenges - we can manage the complete project from concept to full production release.

